


Desk Extension

ACC036


UPLIFT DESK

Package Contents

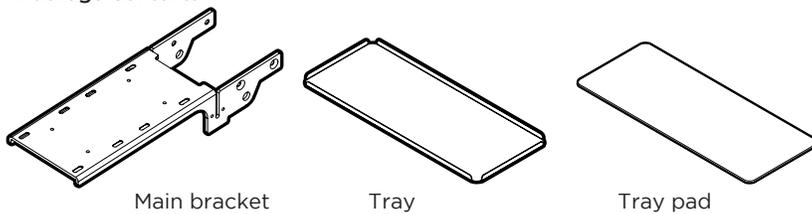

- M8x10 Flat head screw (qty 4)
- M6x10 Socket head screw (qty 4)
- M6x8 Flat head screw (qty 4)
- #10x5/8" Wood screw (qty 2)
- Hex nut (qty 4)
- Allen wrench (4 mm and 5 mm)

The Desk Extension can be installed on either the right or left side of your UPLIFT Desk frame. These Instructions apply to both the UPLIFT Desk C-Frame and T-Frame.

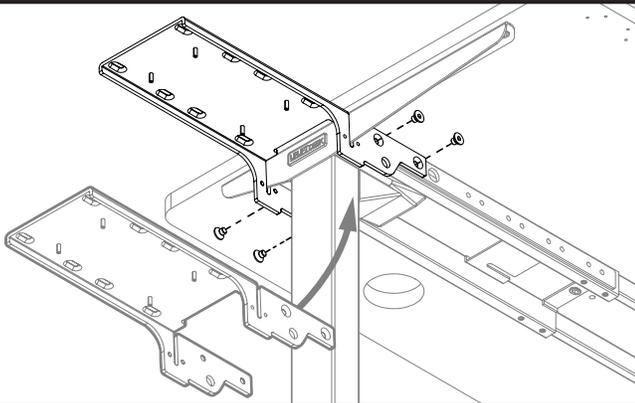


Step 1

Fit the Main bracket around your assembled UPLIFT Desk frame.

Choose the side you want the tray to be on, and bring the Main bracket from below, then fit the slot around the desk frame side bracket as shown.


Align the two holes on each side of the Main bracket with holes in the desk frame and attach using the four M8x10 Flat head screws. Start all screws loosely by hand first, then tighten with the 5mm Allen wrench.

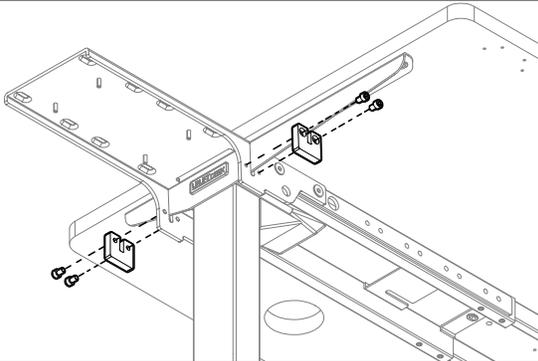

Step 2

If you plan on placing more than 30 lbs. of weight on the Desk Extension, it's important to add U-brackets during this step, as they give additional strength and stability to this accessory.

Line up one U-bracket on the front side of the Main bracket, fitting the slot around the side bracket on your frame. Attach using two M6x10 Socket screws and tighten with the 5mm Allen wrench. Repeat this step with the second U-bracket on the other side. Make sure all four screws are securely tightened before moving on.

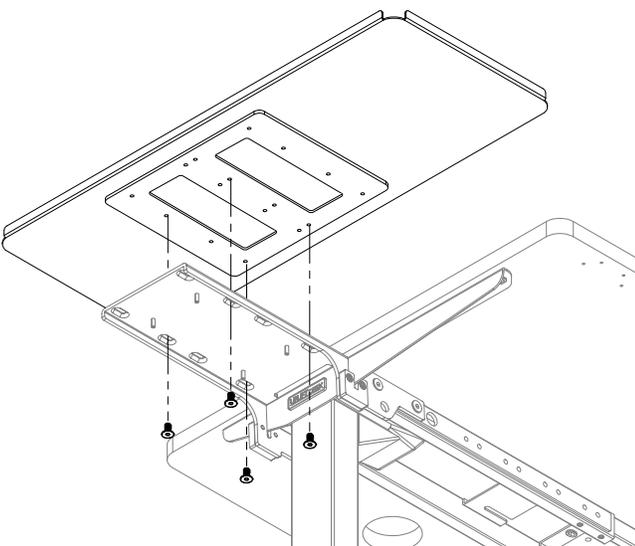


Step 3

Place the Tray on top of the Main bracket, lining up the front and back of the tray with the front and back edges of the desktop.

From the underside, attach the Tray to the Main bracket using four M6x8 Flat head screws, inserting the screws into the four holes that most closely align with the slots in the bottom of the Main bracket.

Only tighten each screw a few turns by hand. Once all screws are in place, push the Tray so it sits flush against the side of the desktop and using the 4mm Allen wrench, tighten all four screws.

Once Tray is installed, you can place the black neoprene rubber Tray pad on top to protect the Tray's surface. If you would like the pad to be permanently attached, simply remove the paper backing from the Tray pad and stick into place.

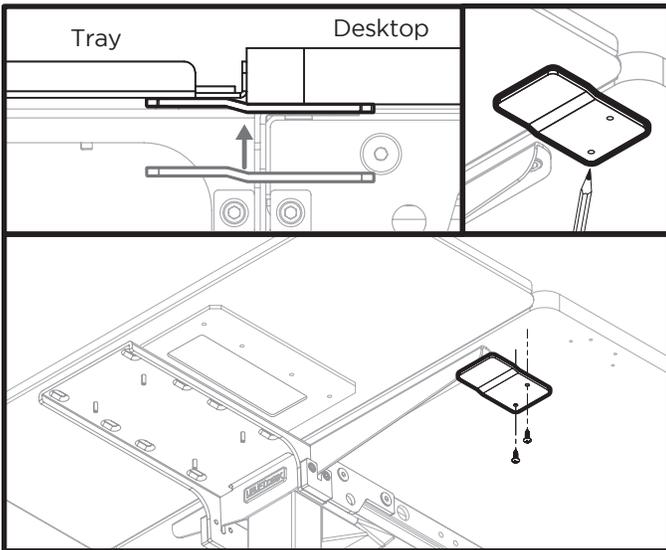


Step 4

The Support bracket is optional. If you do not plan on placing excessive weight towards the front of the Desk extension tray you may not need to add this bracket.


Line up the Support bracket just past the the front end of your desk's side bracket, bridging the gap between the bottom of the Desktop and the bottom of the Tray in the orientation shown with the bent up portion towards the Tray.

While holding the Support bracket in place, make a pencil mark at each hole location and then attach it using the two #10x5/8" Wood screws.

Note: DRILL NO DEEPER THAN 1/2" because that will increase the risk of drilling through your desktop. We recommend wrapping a piece of tape around your drill bit 1/2" from the tip. Stop drilling just before the tape touches the desktop.



Compatible with CPU Holder by UPLIFT Desk

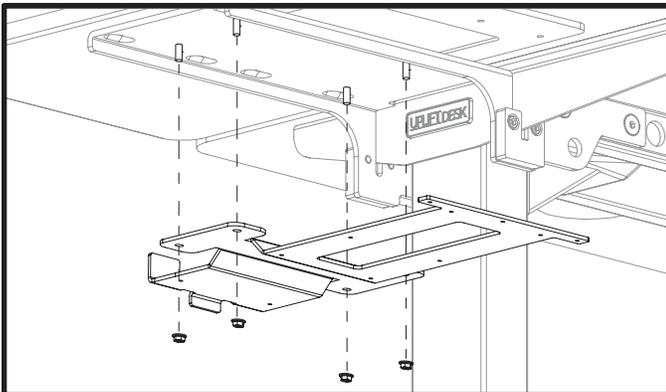


If you have purchased a CPU Holder (CPU128) and Desk Extension CPU Adapter (CPU002), follow these assembly instructions.

Align the CPU002 CPU Adapter holes with the threaded studs on the Main bracket you just assembled, and attach using the four Hex nuts included in this package.

The long end of the CPU Adapter should face the front of the desk. Next, follow the instructions included with the CPU Adapter and CPU Holder for the remainder of the assembly.

Compatible with Under Desk Hammock by UPLIFT Desk

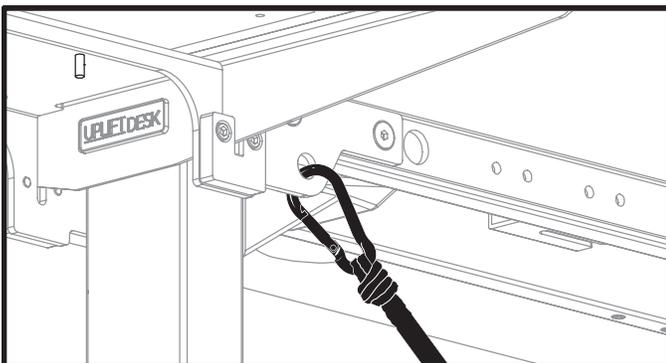

The Desk Extension Main bracket is also compatible with our Under Desk Hammock (ACCO42).

You may attach one end of the hammock to one of the accessory mounting points on your Desk Extension Main bracket as shown.

Follow the instructions provided with the Under Desk Hammock for its complete installation and adjustments.

Note: The Under Desk Hammock is designed to be used on our 72" and 80" wide desks only.

⚠ CAUTIONS & WARNINGS

- ⚠ **CAUTION:** Read all instructions before assembly. Failure to assemble or operate properly may result in damage or personal injury. Retain manual for future reference.
- ⚠ **CAUTION:** Maximum weight capacity with U-brackets installed: 60 lbs (Weight capacity without U-brackets installed: 30 lbs)

© Copyright Notice: These instructions are a component of this accessory. These instructions are part of the scope of delivery, even if the item is resold. These instructions are also available on the UPLIFT Desk website: uplift-desk.com. Excerpts or copies may not be forwarded to third parties or used in any other published form without the prior written consent of UPLIFT Desk. These instructions are subject to United States copyright law.